

PRODUCT DATA 2010



INTERNATIONAL PRODUCTS & OEM PRODUCTS

KK1 CORRUGATED CONDUIT ADAPTOR

The KK1 is used to connect 10, 11.5, 12 or 13mm corrugated conduits to standard 16mm wall box inlets.

Technical specifications

Fits corrugated conduit sizes (outside diam.): 10, 11.5 - 12 and 13mm
 Fits wall box inlet size: 16mm
 Min. inside diameter: 9mm

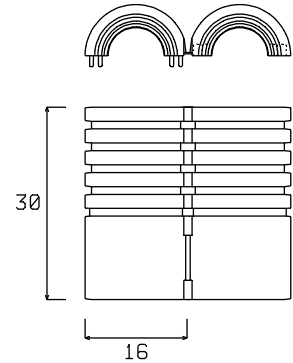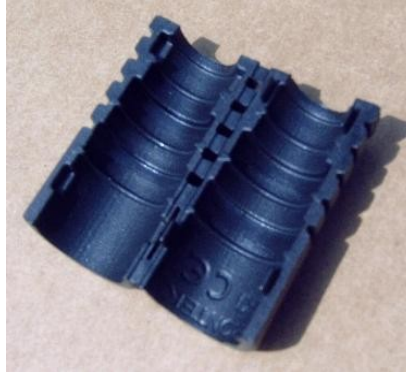

Dimensional specifications are only approximate.

Ordering information



Product	Type des.	GS1 art. no.	Qty./box	Additional information
Corrugated conduit adaptor	KK1	7070772001003	25	For electrical wholesalers & contractors
Corrugated conduit adaptor	KK1-E5	7070772001027	1000	For OEM's

KK2 CORRUGATED CONDUIT ADAPTOR

The KK2 is used to connect 6, 7 or 8mm corrugated conduits to standard 16mm wall box inlets.

Technical specifications

Fits corrugated conduit sizes (outside diam.): 6, 7 and 8mm
 Fits wall box inlet size: 16mm
 Min. inside diameter: 4.5mm

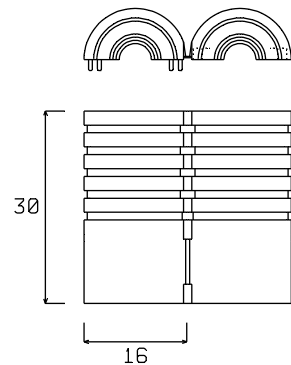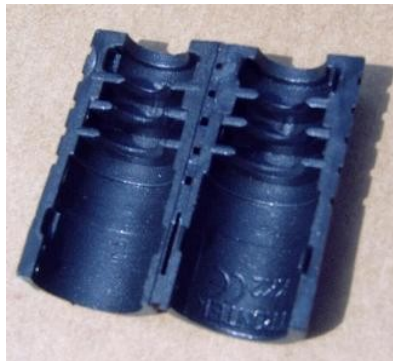

Dimensional specifications are only approximate.

Ordering information

Product	Type des.	GS1 art. no.	Qty./box	Additional information
Corrugated conduit adaptor	KK2	7070772001041	25	For electrical wholesalers & contractors
Corrugated conduit adaptor	KK2-E5	7070772001065	1000	For OEM's

KE16 CORRUGATED CONDUIT CONNECTOR

The KE16 is used to connect 16mm corrugated conduits to standard 16mm flange holes.



Technical specifications

Fits corrugated conduit sizes (outside diam.): 16mm
Fits flange hole size: 16mm

Custom sizes on request

Ordering information

Product	Type des.	GS1 art. no.	Qty./box	Additional information
Corrugated conduit connector KE16 Other packaging on request		7070772001201	25	For electrical wholesalers & contractors

TRONTEK AS
Innherredsveien 60
NO-7042 TRONDHEIM
Norway

Tel.: +47 - 73 50 36 53
Fax.: +47 - 73 50 46 97
Email: mail@trontek.no

Internet: www.trontek.eu
Enterprise no.: NO-941768326MVA

Date: 11.9.2009